



CLEANING

TOPKLEAN™ MC 20D

REMOVAL OF OIL & GREASE
SOLVENT VACUUM PROCESS

ENVIRONMENTAL FRIENDLY ALTERNATIVE TO PERCHLORETHYLENE & nPB

BENEFITS

TOPKLEAN MC 20D is especially designed to replace solvents with a high HSE impact such as nPB and perchloroethylene and to offer a product in accordance with the latest and future environmental regulations. It is used in vacuum process to offer an environmentally friendly solvent solution without compromising on high cleaning performance. Its performance in solubilizing organic compounds allows it to remove hydrocarbon oils & greases from all metals and most plastics used in the industry. It could also remove a small quantity of water-soluble oils but need to be evaluated & tested before.

TOPKLEAN MC 20D is qualified and used by several actors in the aerospace industry (e.g. SAFRAN IN 1500B)

PERFORMANCE	<ul style="list-style-type: none"> Excellent solubility of hydrocarbon oils & greases Excellent compatibility with all metals, glasses, ceramic & many plastics Allows excellent results in surface tension measurements of treated parts
COST	<ul style="list-style-type: none"> Continuous recycling in equipment for a long bath-life Limited consumption thanks to airtight equipment Thermally and chemically stable in use, so no need of using an additive
HSE	<ul style="list-style-type: none"> Very low toxicity (refer to the SDS) No Ozon Depletion Potential (ODP) & no Global Warming Potential (GWP) High flash point (non-flammable for transport) No aromatics & halogenated compounds

SPECIFICATIONS

SPECIFICATIONS	VALUES	METHODS
Aspect	Transparent, colorless	Visual
Density at 20°C	880	ASTM D 4052
Acid index	<0,01	Internal

CHARACTERISTICS


CHARACTERISTICS	VALUES	METHODS
Boiling point (°C / °F)	170-180 °C /	ASTM D1078
Flash Point (PMCC)	>64°C / 147 °F	ASTM D93
Viscosity at 25°C	1,6mm ² /s	ASTM D445
Surface tension at 20°C (dynes/cm)	23	ASTM D971
Relative evaporation rate : nBuAc=1	0,04	ASTM D3539
Dielectric rigidity	200 KV/cm	DIN/VDE 0370/5
Miscibility in water	Slightly miscible	Internal
Relative Vapor density at 20°C	4,6	Internal
Latent heat of vaporization (kJ/kg at bp)	320	Calculated
Specific heat (kJ/kg.K)	2.0/2.1	Calculated
Heat conductivity at 20°C	0,13 W/M.K	Calculated

PROCESS RECOMMENDATION

The best process will depend on factors such as operating conditions, equipment, desired cleaning time and the nature of contaminants. Our team is ready to advise you.

PROCESS EXAMPLE

HC oil & grease removal

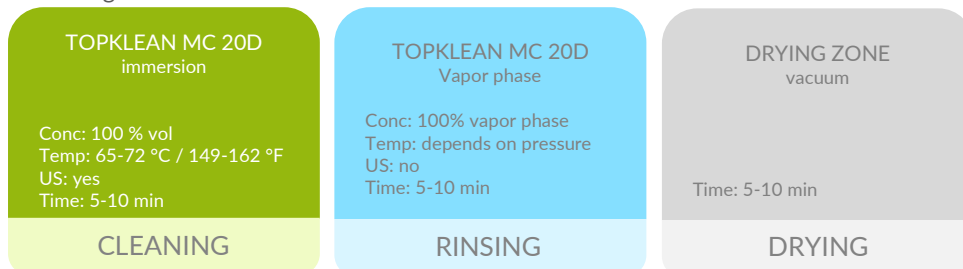

- Temperature depends on chamber pressure settings, which are different for each type of equipment.
- A dedicated PCA Kit to monitor the bath status and compatibility report of TOPKLEAN MC 20D with different materials are available on request.

PACKAGING, STORAGE & SHELF LIFE

- Keep products in closed original packaging and store at room temperature.
- Shelf life is minimum 18 months from production date when kept in recommended conditions.



200 L DRUM



20 L CANISTER

HEALTH, SAFETY & ENVIRONMENT

PROPERTIES	PROMOSOLV MC 20D
Ozone Depleting Potential (ODP)	0
Global Warming Potential (GWP)	Not applicable
Atmospheric lifetime (years)	Not applicable
VOC	800 G/L
Flashpoint	64°C - 147°F

Contains no Reach Substances (on Candidate list, Annex XIV & XVII) / Contains no persistent organic pollutant (EC 850/2004) / Contains no Import/Export Hazardous substances (EU 649/ 2012)

Please refer always to the Safety Data Sheet (SDS or MSDS) prior to use. Our SDS can be downloaded at www.quickfds.com. We will request to provide your email address, so we can automatically send you a new version of the SDS when a future update would occur.

TECHNICAL SUPPORT & FREE-OF-CHARGE TESTING

Inventec has a worldwide dedicated Technical Support team to help you along the different stages of our cooperation.

Depending on your request, we provide online or onsite support

- to select the right product based on your specific needs
- to assist you in your product qualification process
- to guide you with the initial set up of you process at all your worldwide manufacturing facilities
- to provide fast response on technical issues which could occur at any time during mass production.

Customers are also welcome in our CLEANING CENTERS to see the process in action and to get convinced by our solutions. We cover water- and solvent based processes.

Inventec is unique in the world by developing not only cleaning materials but also soldering and coating solutions. These materials are very closely linked with each other from a process point of view. Talking to our Technical Team, who understands very well these 3 different product groups, will help you greatly to overcome technical challenges within your overall process.

Contact our technical support via contact@inventec.dehon.com or your local sales representative.

ABOUT INVENTEC

Inventec is a global provider of CLEANING, SOLDERING & COATING materials for Electronic, Semiconductor and Industrial applications. For over 40 years we have shown leadership in innovation by putting HEALTH IMPACT, SUSTAINABILITY and RELIABILITY at the core of our product development.

With ISO 9001 & 14001 production sites in France, Switzerland, USA, Mexico, Malaysia and China we can guarantee a smooth and cost-effective supply chain.

We supply to many industries but the excellent performance of our products in applications which demand high reliability, leads us to focus especially on the AUTOMOTIVE, AEROSPACE, SEMICONDUCTOR, ENERGY and MEDICAL industry.

www.inventec.dehon.com



S O L D E R I N G • C L E A N I N G • C O A T I N G

In accordance with the Annex II of Directive 2011/65/UE (RoHS), including its amendments, we certify that this product does not contains quantities above 0.1% of Hg, Pb, Cr VI, PBB, PBDE, DEHP, BBP, DBP, DIBP and above 0.01% of Cd

This data is based on information that the manufacturer believes to be reliable and offered in good faith. In no event will INVENTEC PERFORMANCE CHEMICALS be responsible for special, incidental and consequential damages. The user is responsible to the Administrative Authorities (regulations for the protection of the Environment) for the conformity of his installation.

Inventec Performance Chemicals – 26 rue de Coulons. 94360 Bry-sur-Marne, France
Limited company with capital of 600 000€ - 964 500 706 RCS Créteil